

# Boca Systems

Solutions for the Ticketing Industry

## Lemur-C Ticket Printer



### General

**Print Method:** direct thermal  
**Print Speed:** 8" per sec. maximum  
**Resolution:** 203 dpi (8 dots/mm), 300 dpi (premium)  
**Size:** 6.5 H x 6.6 W x 6.7 L  
**Weight:** 4 pounds

### Media Transport

**Media Type:** fanfolded tickets  
**Ticket Thickness:** .004" to .0075" (or .010" polypropylene)  
**Ticket Width:** 2.0" to 3.25" (standard) or 1" to 2" (premium)  
**Positioning:** optical detector senses black mark at 5" from ticket edge  
**Ticket Separation:** Manual tear-off or optional cutter with hopper (horizontal) or top plate (vertical)

### Interfaces

**Standard:** Serial and USB  
**Optional:** Ethernet, Bluetooth & Wi-Fi

### Protocols

**Standard:** FGL  
**Drivers:** Windows, Mac and Linux

### Approvals

UL / FCC / CE / CCC

### RFID (optional)

ISO14443, ISO15693  
Others available upon request

### Power Requirements

100-240 VAC, 50/60Hz, 65W max  
Amp max 24 V DC, 2.5 Amp max

### Environmental

\* **Operating Temperature:** -20 to 60°C  
**Relative Humidity:** 10% to 90%  
**Storage Temperature:** -40 to 70°C  
above specs without condensation

### Bar Codes

Most 1D and 2D codes including PDF417, DataMatrix, QR, Aztec

Full speed printing of picket fence and ladder bar codes

### Fonts

**Resident fonts:** 16 bitmapped fonts (including Cyrillic and German characters) and Asian character sets (optional)  
**Downloadable fonts:** HP Soft fonts / TrueType fonts  
Downloadable RAM: up to 27MB  
Downloadable Flash: up to 12MB (optional)

### Graphics

FGL format, PCX format (1bit b/w), BMP format (1bit b/w)

### Web Interface (ethernet only)

Real-time status monitor  
Email notification


### Projected Life

**Cutter:** 1 million cuts  
**Print Head:** 100 km of paper or 100 million dot activations  
**Bonus:** Free print head replacements when exclusively using Boca paper

### Warranty

**Printer:** 1 year, parts and labor  
**Print head:** 90 days

**Patents:** BOCA has a patented head protection system that prevents premature head failure

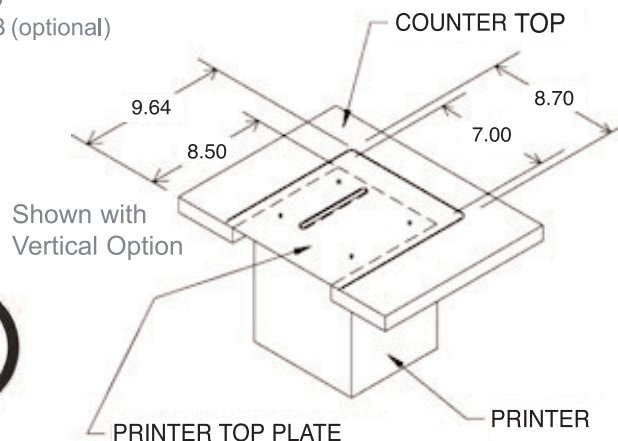

\* Print speed may be affected at extreme temperatures